

CENTA

LED Bulkhead Lights

CNT01565KC80NAFB65ON

729800003- Ordering Code



General Information

| |
|--------------------------|
| Mounting Type |
| Surface |
| Product Type |
| LED Bulkhead |
| IP Rating |
| IP65 |
| Housing Type |
| Die Cast Aluminium |
| LED Binning |
| McAdam<5 |
| Housing Color |
| RAL 9005 Traffic Black |
| Input Supply |
| AC 220-240V, 50/60Hz |
| Control Gear |
| Tridonic/Vossloh Schwabe |
| Control Type |
| On/Off |
| Output Power |
| 15W |
| Fitting Lumens |
| >100lm/W |
| Beam Angle |
| Wide Beam 110° |
| Primary Optics |
| NA |
| Secondary Optics |
| Opal Diffuser |
| Lumen output |
| 1500lms |
| Vandal proof |
| Yes |
| Anti-corrosion |
| Yes |
| Chip Family |
| Osram |
| CCT |
| 6500K |
| Lifetime |
| 50000H |
| CRI |
| 80 |
| Length |
| Refer Dimensional table |
| Height |
| Refer Dimensional table |


Description

Circular surface-mounted weather-proof luminaire For wall or ceiling mounting. With opal polycarbonate diffuser, impact resistant. With finely structured attractive matt decorative surface. Circular diffuser, spherical, especially dimensionally stable. Luminaire diameter Ø 223 and 275mm, luminaire height 70 mm. Permissible ambient temperature (ta): - +55 °C. IP65, impact resistance level IK10, switchable. The luminaire complies with the fundamental requirements of basic lighting standards

Application Areas

Stairways, Balcony, Patio Spaces, Corridors

Dimensional Details

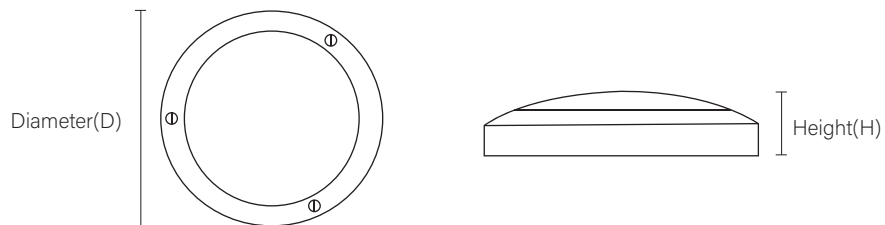

Dimensional table

| | |
|---------|------------------|
| 1500lms | D:223mm, H: 70mm |
| 2000lms | D:275mm, H: 70mm |
| 3500lms | D:275mm, H: 70mm |

Available CCTS

| | |
|-------|-----|
| 3000K | 30K |
| 4000K | 40K |
| 6500K | 65K |

Available Power

| | |
|-----|-----|
| 15W | 015 |
| 20W | 020 |
| 35W | 035 |

Available CRI

| | |
|--------|-----|
| 80 CRI | C80 |
|--------|-----|

Driver Options

| | |
|----------|---|
| Switched | N |
|----------|---|


IP Rating

| | |
|------|-----|
| IP65 | 650 |
|------|-----|

Product combinations along with their Ordering codes

| Alpha Numeric Code | CCT | Control Type | Lumens | IP Rating | Ordering Code |
|-----------------------------|--------------|---------------|----------------|-------------|------------------|
| CENTA 15W | | | | | |
| CNT01530KC80NAFB65ON | 3000K | On/Off | 1500lms | IP65 | 729800001 |
| CNT01540KC80NAFB65ON | 4000K | On/Off | 1500lms | IP65 | 729800002 |
| CNT01565KC80NAFB65ON | 6500K | On/Off | 1500lms | IP65 | 729800003 |
| CENTA 20W | | | | | |
| CNT02030KC80NAFB65ON | 3000K | On/Off | 2000lms | IP65 | 729800004 |
| CNT02040KC80NAFB65ON | 4000K | On/Off | 2000lms | IP65 | 729850005 |
| CNT02065KC80NAFB65ON | 6500K | On/Off | 2000lms | IP65 | 729800006 |
| CENTA 35W | | | | | |
| CNT03530KC80NAFB65ON | 3000K | On/Off | 3500lms | IP65 | 729800007 |
| CNT03540KC80NAFB65ON | 4000K | On/Off | 3500lms | IP65 | 729850008 |
| CNT03565KC80NAFB65ON | 6500K | On/Off | 3500lms | IP65 | 729800009 |

Specification Code Details

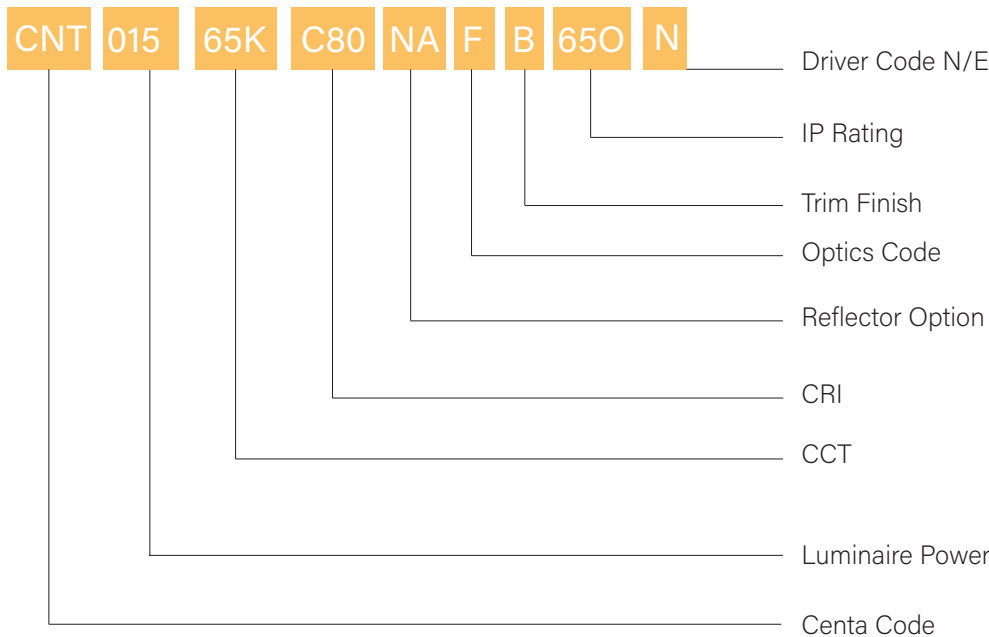

Grill accessories to be ordered additional:



CNTACC0001



CNTACC0002



Made in UK

5 Years Warranty