


LINE

LED Strip Light

LNXXXXXXXXXXXXXXXXXXXX

7285XXXXX- Ordering Code

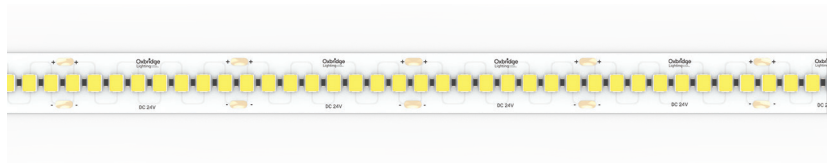

General Info

Mounting Type

Surface mounting

Product Type

Strip Light

IP Rating

IP20/65

Housing Type

Flexible PCB

LED Binning

McAdam<3

Flexibility

Flexible PCB

Input Supply

DC 24V

Control Gear

MeanWell/Vossloh Schwabe

Control Type

On/Off & DALI (on Request)

Primary Optics

NA

Strip Lumens

>100lms/mtr

Beam Angle

Wide Beam

LEDs per Mtr

240

Output Power

Refer available power options

Mounting

3M tape

IP Coating on Strips

Clear RTV silicone adhesive

Chip Family

2835

CCT

Refer available CCTs

RGB Availability

Not available

Lifetime

50000H

CRI

>80

Length

5000mm/Roll

Width

12mm

Cuttible Length

33.3mm


Description

Line is the flexible strip light from oxbridge lighting provides an excellent accent lighting for your interiors and exteriors. Line can be easily mounted onto a surface, very versatile and can be cut to length or connected together to create a custom lighting setup. They can be controlled by a variety of methods including on/Off and dimming options. Line is available in multiple options with different CCTs, powers and IP ratings for the ease of use. Line is very compact with 12mm width and having 240 LED modules per metre which provides a dotless lighting. The Line allows a cutting option for every 33.3mm which helps customer for all requirements in length. The product is available in IP20 and IP65 modes also in order to satisfy the indoor and outdoor needs. Accessories are available for Line to make its installation a hassle free one.

Application Areas

Reception, Foyers, Office spaces, Living areas, Dining spaces, Hotels, Hospitality areas, Conference halls, Food courts, Corridor areas and much more

Dimensional Details

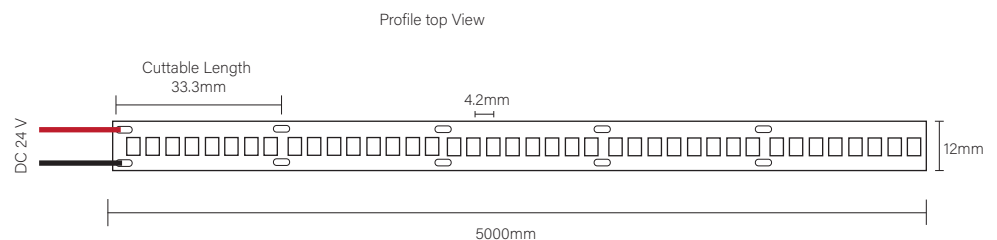

Profile Side View



Available CCTS

2700K	27K
3000K	30K
4000K	40K
6500K	65K

Available Power

4.8W/m	005
9.6W/m	010
14.4W/m	015
19.2W/m	020

Available CRI

80 CRI	C80
--------	-----

Driver Options

Switched	N
0/1-10V	0

IP Rating


IP20	20E
IP65	65G

Product combinations along with their Ordering codes

Alpha Numeric Code	CCT	Control Type	IP Rating	Ordering Code
LINE 4.8W/m				
LNE00527KC80NAFY20EN	2700K	On/Off	IP20	728500001
LNE00530KC80NAFY20EN	3000K	On/Off	IP20	728500002
LNE00540KC80NAFY20EN	4000K	On/Off	IP20	728500003
LNE00565KC80NAFY20EN	6500K	On/Off	IP20	728500004
LNE00527KC80NAFY65GN	2700K	On/Off	IP65	728500005
LNE00530KC80NAFY65GN	3000K	On/Off	IP65	728500006
LNE00540KC80NAFY65GN	4000K	On/Off	IP65	728500007
LNE00565KC80NAFY65GN	6500K	On/Off	IP65	728500008
LINE 9.6W/m				
LNE01027KC80NAFY20EN	2700K	On/Off	IP20	728500009
LNE01030KC80NAFY20EN	3000K	On/Off	IP20	728500010
LNE01040KC80NAFY20EN	4000K	On/Off	IP20	728500011
LNE01065KC80NAFY20EN	6500K	On/Off	IP20	728500012
LNE01027KC80NAFY65GN	2700K	On/Off	IP65	728500013
LNE01030KC80NAFY65GN	3000K	On/Off	IP65	728500014
LNE01040KC80NAFY65GN	4000K	On/Off	IP65	728500015
LNE01065KC80NAFY65GN	6500K	On/Off	IP65	728500016
LINE 14.4W/m				
LNE01527KC80NAFY20EN	2700K	On/Off	IP20	728500017
LNE01530KC80NAFY20EN	3000K	On/Off	IP20	728500018
LNE01540KC80NAFY20EN	4000K	On/Off	IP20	728500019
LNE01565KC80NAFY20EN	6500K	On/Off	IP20	728500020
LNE01527KC80NAFY65GN	2700K	On/Off	IP65	728500021
LNE01530KC80NAFY65GN	3000K	On/Off	IP65	728500022
LNE01540KC80NAFY65GN	4000K	On/Off	IP65	728500023
LNE01565KC80NAFY65GN	6500K	On/Off	IP65	728500024
LINE 19.2W/m				
LNE02027KC80NAFY20EN	2700K	On/Off	IP20	728500025
LNE02030KC80NAFY20EN	3000K	On/Off	IP20	728500026
LNE02040KC80NAFY20EN	4000K	On/Off	IP20	728500027
LNE02065KC80NAFY20EN	6500K	On/Off	IP20	728500028
LNE02027KC80NAFY65GN	2700K	On/Off	IP65	728500029
LNE02030KC80NAFY65GN	3000K	On/Off	IP65	728500030
LNE02040KC80NAFY65GN	4000K	On/Off	IP65	728500031
LNE02065KC80NAFY65GN	6500K	On/Off	IP65	728500032



Specification Code Details

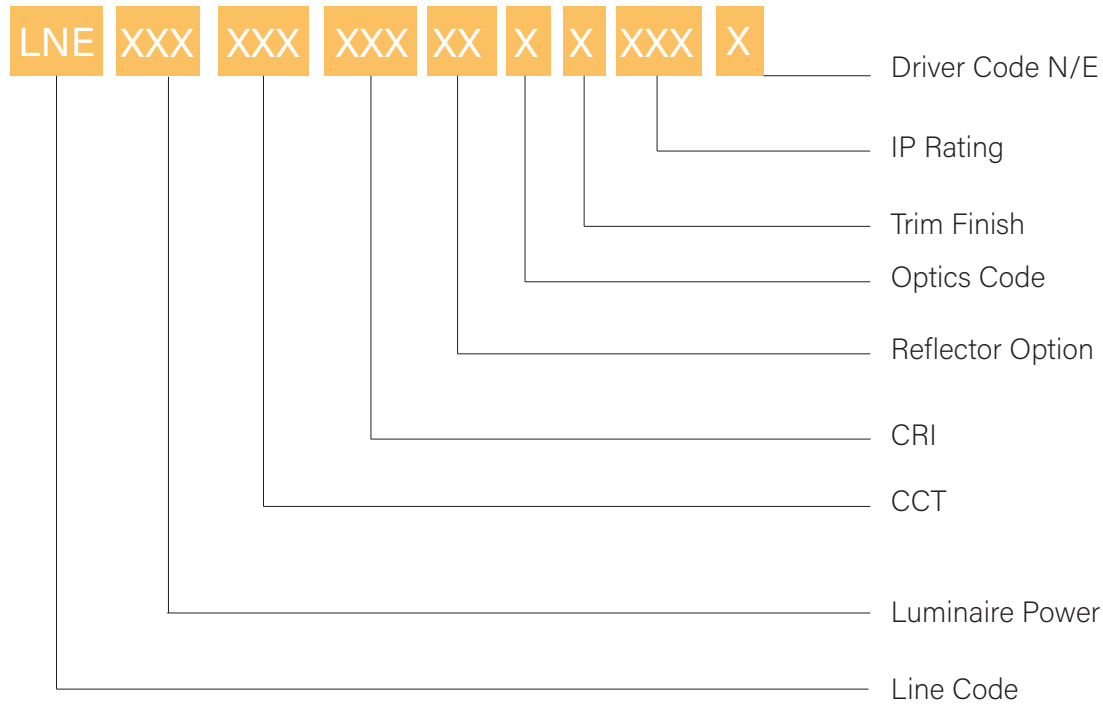

Accessories



LNE10FF2G



LNE10CF2

Customise your product according to your requirement from our website www.oxbridgelighting.com

Refer Instruction Manual for detailed Installation Procedure

Dimmable option is also available, Just replace the last digit of the Alpha numeric code with digit 0 for the dimmable model.