

# ECHO

LED Recessed Downlight BOH

ECW01265KC80W1WY20SN



## General Information

### Mounting Type

Recessed

### Product Type

LED Recessed Downlight

### IP Rating

IP20 & IP44 on request

### Housing Type

Die Cast Aluminium

### LED Binning

McAdam<5

### Housing Color

RAL 9003

### Recessing with

Snap Spring

### Input Supply

AC 220-240V, 50/60Hz

### Control Gear

Philips / Tridonic

### Control Type

On/off

### Output Power

12W

### Fitting Lumens

1350lms

### Optics

80°

### Primary Optics

Reflectors

### Secondary Optics

Opal Diffuser

### LED type

SMD

### Chip Family

Osram/Bridgelux

### CCT

6500K

### Lifetime

L70 B20, 50000Hrs

### CRI

80

### Reflector Types

White

### UGR

<19

### Diameter

138mm

### Height

64mm

### Cut open

120mm


## Description

High output, recessed, fixed LED architectural downlight. Suitable for high ceiling areas, feature walls and display lighting applications for BOH. Includes 2-step McAdam binning and high output COB reflector. Colour temperature ranges from 2700k – 6500k. Mounting wings to suit all ceiling types. Features dedicated remote constant current LED driver. Echo is available in both IP20 and IP44 versions, with diffusers, and reflector options and a handfull of open sizes. Suits all dimming protocols and conforms to international standards and directives. The model provides a wide option for the back of house requirements.

## Application Areas

Villas, Apartments, Maid rooms, Service areas, Cafes, Canteens, Corridors and lot more areas


## Dimensional Details

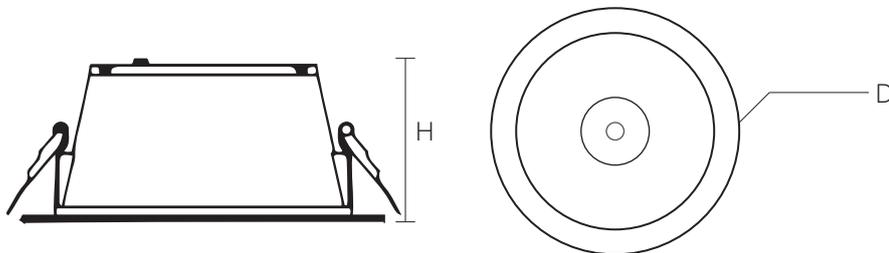

## Dimensional table

Upto 1350lms	D:138mm, H:64mm, C:120mm
--------------	--------------------------

## Photometric Distribution



12W