

ECHO

LED Recessed Downlight BOH

ECW01530KC80W1WY20SN



General Information

Mounting Type

Recessed

Product Type

LED Recessed Downlight

IP Rating

IP20 & IP44 on request

Housing Type

Die Cast Aluminium

LED Binning

McAdam<5

Housing Color

RAL 9003

Recessing with

Snap Spring

Input Supply

AC 220-240V, 50/60Hz

Control Gear

Philips / Tridonic

Control Type

On/off

Output Power

15W

Fitting Lumens

1800lms

Optics

80°

Primary Optics

Reflectors

Secondary Optics

Opal Diffuser

LED type

SMD

Chip Family

Osram/Bridgelux

CCT

3000K

Lifetime

L70 B20, 50000Hrs

CRI

80

Reflector Types

White

UGR

<19

Diameter

165mm

Height

74mm

Cut open

140mm


Description

High output, recessed, fixed LED architectural downlight. Suitable for high ceiling areas, feature walls and display lighting applications for BOH. Includes 2-step McAdam binning and high output COB reflector. Colour temperature ranges from 2700k – 6500k. Mounting wings to suit all ceiling types. Features dedicated remote constant current LED driver. Echo is available in both IP20 and IP44 versions, with diffusers, and reflector options and a handfull of open sizes. Suits all dimming protocols and conforms to international standards and directives. The model provides a wide option for the back of house requirements.

Application Areas

Villas, Apartments, Maid rooms, Service areas, Cafes, Canteens, Corridors and lot more areas


Dimensional Details

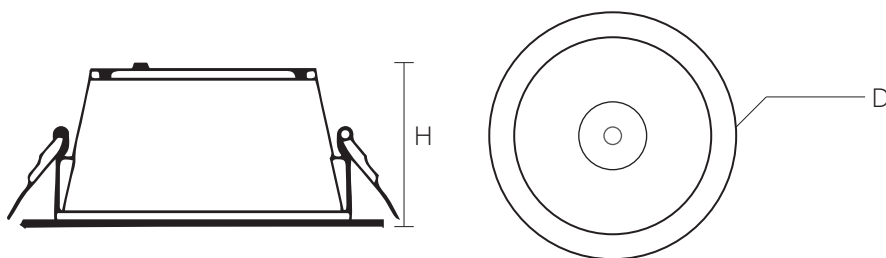

Dimensional table

Upto 1350lms	D:165mm, H:74mm, C:140mm
--------------	--------------------------

Photometric Distribution



15W



Made in UK

5 Years Warranty